



To: Colleen Prather, Permitting Technical Advisor
Angie Arbaiza, Permitting Lead
Michel Groleau, General Supervisor,
Permitting and Regulatory Affairs

Date: November 19, 2020

c:

From: Changheng Chen, Physical Oceanographer
Aurelien Hospital, Group Manager

Memo No.: 01

File: ENG.ACLE03008-03

Subject: Addendum to 3-D Hydrodynamic Modelling of Melvin Bay to Characterize the Long-Term Mixing and Transport of the Released Effluent

1.0 INTRODUCTION

Tetra Tech Inc (Tetra Tech) was engaged by Agnico Eagle Mines Limited (Agnico Eagle) to conduct 3-D circulation modelling in Melvin Bay, NU, to assess the dilutions resulting from a discharge through a proposed marine diffuser. In October 2020, Tetra Tech submitted a study report titled “*Meliadine Mine Waterline Addendum: Melvin Bay Hydrodynamic Modelling and Characterization of the Fate and Behaviour of the Discharged Saline Effluent*”. This report presented the modelling framework, environmental input data and results corresponding to the discharge of a saline non-buoyant effluent, slightly denser than ambient ocean waters.

This technical memo serves as an addendum to Tetra Tech’s October 2020 study. This study focuses on the transport and mixing of a buoyant effluent. The same hydrodynamic model is used in this addendum study. However, this study focuses now on the release of a buoyant effluent, composed of less saline water, and therefore less dense than ambient ocean waters, as compared to the effluent modelled in the October 2020 study. Model forcing data, initial and boundary conditions, as well as model validation can be found in the Tetra Tech’s October study. Characteristics of ocean current in the Melvin bay were also presented in Tetra Tech’s October study.

This technical memo presents the effluent discharge configuration in Section 2. Section 3 shows the results of effluent accumulation, effluent concentration and temperature and salinity changes due to the effluent discharge in Melvin Bay. Conclusions of this study are given in Section 4.

2.0 DISCHARGE CONFIGURATION

This addendum investigates the transport and mixing of a buoyant effluent in Melvin Bay. The effluent flow is conservatively estimated at 20,000 m³/d from June through October. The discharge rate is well above the projected mean daily flow rates for each month over mine operations (i.e., 2020 to 2028) and represents a conservative scenario. The 3-D hydrodynamic model is run through the discharge season (i.e., open water) from June to October. While the effluent discharge stops at the end of October, the simulation continues for an extra month, i.e., November, with no effluent discharge to allow an investigation on the timeline for the system to recover from the effluent discharge. Effluent is discharged at the proposed diffuser location as from Tetra Tech’s previous diffuser design study (545789 m E and 6963370 m N) and at a depth of 20 m Chart Datum.

The effluent temperature in each month is set to be 3 °C higher than the monthly mean air temperature from the meteorological forcing data, representing the potential heating of the effluent during overland transport through the covered pipeline. Salinity of the effluent is 14.86 PSU and is conservatively converted from a TDS concentration of 14,861 mg/L, which represents the 20th percentile of the effluent TDS (email communication with Golder, November 3, 2020). This TDS concentration is selected to represent a buoyant effluent on the lower end of its density. Table 2.1 summarizes the discharge rate, temperature, salinity and density of the effluent. The effluent density (ranging between 1010.6 kg/m³ and 1011.9 kg/m³) is consistently lower than the ambient ocean water density, which ranges from around 1,024 kg/m³ to 1,027 kg/m³ depending on the ambient seawater temperature and salinity.

Table 1. Effluent Monthly Discharge Rates and Temperature

| Month | June | July | August | September | October | November |
|------------------------------|---------|---------|---------|-----------|---------|----------|
| Discharge Rate (m3/d) | 20,000 | 20,000 | 20,000 | 20,000 | 20,000 | 0 |
| Temperature (°C) | 8.40 | 14.27 | 13.21 | 6.50 | 1.00 | - |
| Salinity (PSU) | 14.86 | 14.86 | 14.86 | 14.86 | 14.86 | - |
| Density (kg/m ³) | 1011.46 | 1010.64 | 1010.81 | 1011.64 | 1011.88 | - |

3.0 RESULTS

3.1 Effluent Accumulation

A total of about 3,060,000 m³ of effluent is discharged between June and October. As a comparison, the amount of water present in the bay at any given time exceeds 50,000,000 m³, without accounting for the thousands of cubic meters of water exchanged daily through tides.

The amount of effluent present in the model domain is primarily determined by discharge rate, as well as metocean conditions (i.e., current in the embayment and water exchange between Melvin Bay and Hudson Bay through tides). The specific concentrations of both chloride and TDS are held constant during the discharge season.

The amount of effluent present within the domain and its percentage of the total released effluent as a function of time are shown in Figure 3.1. Effluent in the water body within Melvin Bay first increases greatly and then fluctuates around a mean level in each subsequent month in response to effluent exiting the model boundary and metocean conditions. It is worth noting that the maximum quantity of effluent reaches a maximum of about 0.12 Mm³ in the embayment that contains over 50 Mm³ of water.

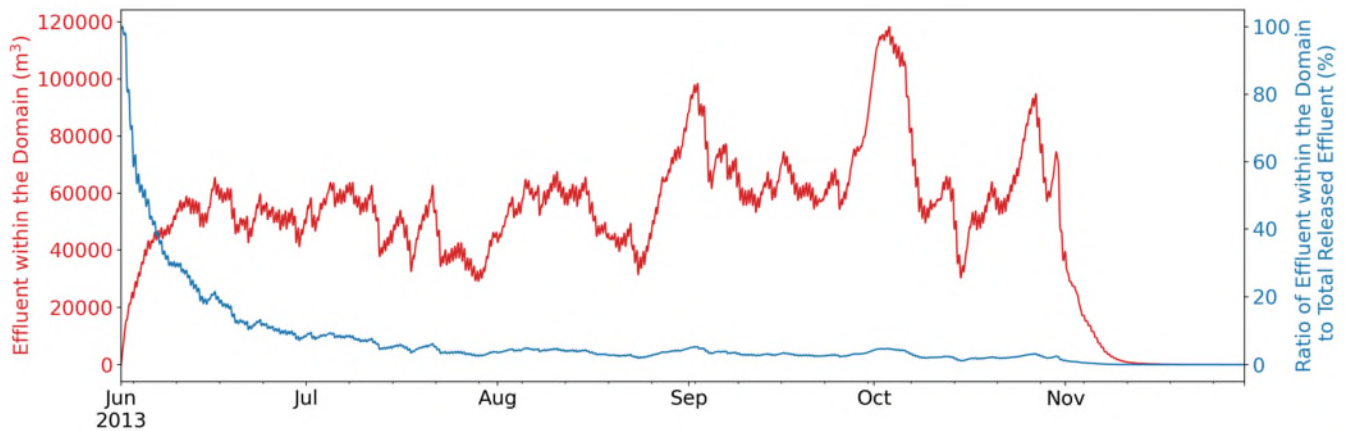


Figure 3.1. Effluent Present within Melvin Bay (red curve) and Ratio of Effluent (blue curve) within the Bay to Total Released Effluent as a Function of Time

The tidal conditions in Melvin Bay shows significant flushing capacity. The system recovers to a pre-effluent-discharge state at a great speed after the discharge stops by the end of October:

- There is about 0.03% of the total released effluent (838 m³ out of 3,060,000 m³) that is still present in Melvin Bay 10 days after the discharge being stopped.
- By November 20, i.e., almost three weeks after the discharge stopped, there is about 0.001% of the total released effluent (32 m³) that still remains in Melvin Bay. In comparison, there was about 55 m³ effluent left by November 20 in the system in Tetra Tech’s October study, where a nonbuoyant effluent was discharged at the same rate of 20,000 m³/d. While similar, this difference can be explained by the nature of the effluent: buoyant effluent tends to rise to the surface, where current speed is relatively stronger and exhibits higher flushing capability as shown in the Tetra Tech’s October study. Note that October and November were considered open water and did not include ice formation in this simulation.

3.2 Effluent Concentration

The different constituents of the effluent are represented as a passive tracer, which has an initial concentration of 1 (m³/m³). A target concentration value of 9% was identified at the 100-m mixing zone (Tetra Tech October 2020 study).

This target concentration is met at all time at the 100-m mixing zone. Knowing that the dash line of Figure 3.2 represents the target/threshold concentration, the maximum concentration is well below the target concentration during the whole model simulation period. The maximum tracer concentration at the edge of the mixing zone is around 0.018 throughout the discharge season. The concentration value reaches near 0 about 20 days after the effluent discharge stops on October 30.

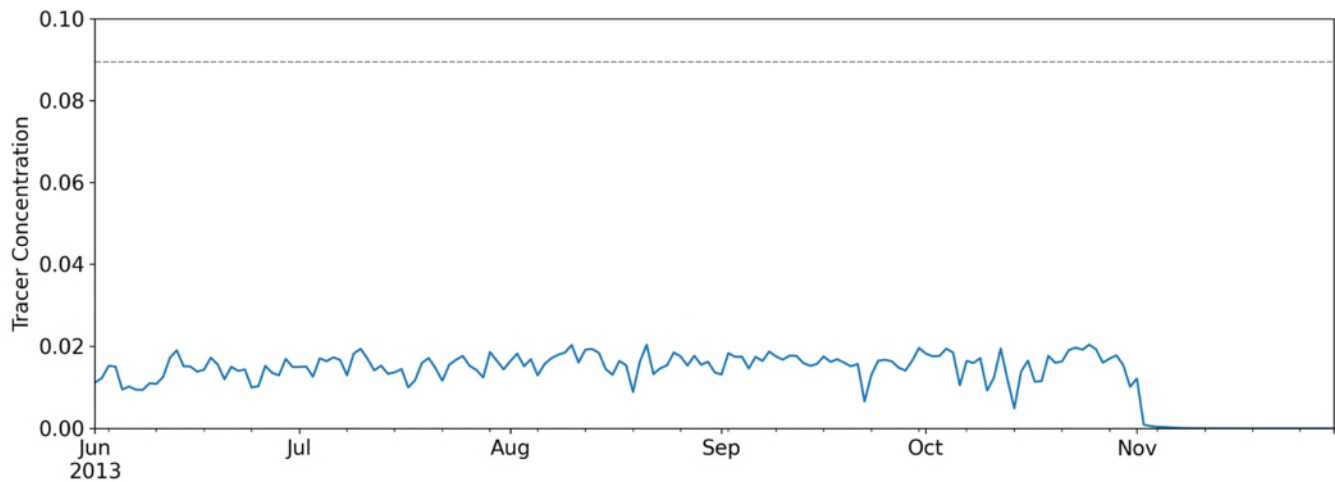


Figure 3.2. Time series of Daily Maximum Effluent Concentration at the 100-m Mixing Zone (Dash Line Indicating the Threshold Concentration Value 0.09)

Figure 3.3 illustrates the spatial distribution of the effluent in a plan view. The monthly mean of maximum concentration in October is displayed. The legend was selected to reflect the threshold concentration as red color. As one can observe, the entire bay appears in blue, indicating tracer concentration much smaller than the threshold concentration. Value probing shows that while still well below the concentration threshold of 9%, maximum tracer concentration tends to be slightly higher in the vicinity of the diffuser during the discharge season, as one could expect.

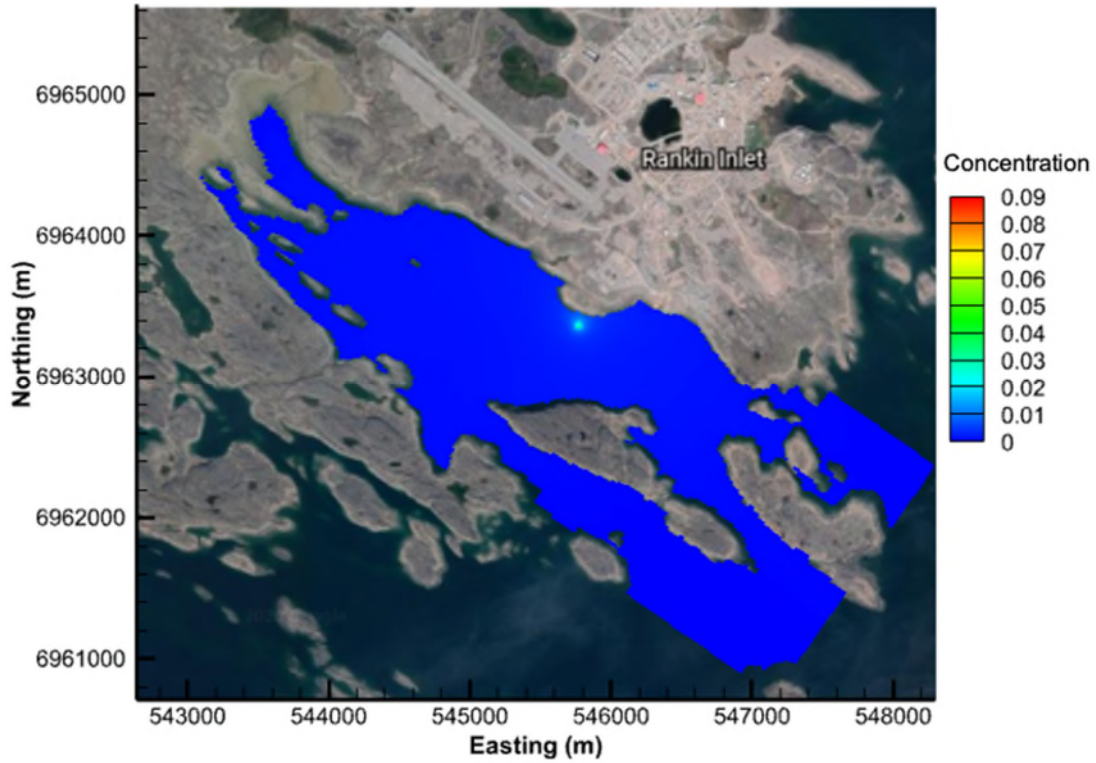


Figure 3.3. Monthly Mean of Maximum Effluent Concentration in October

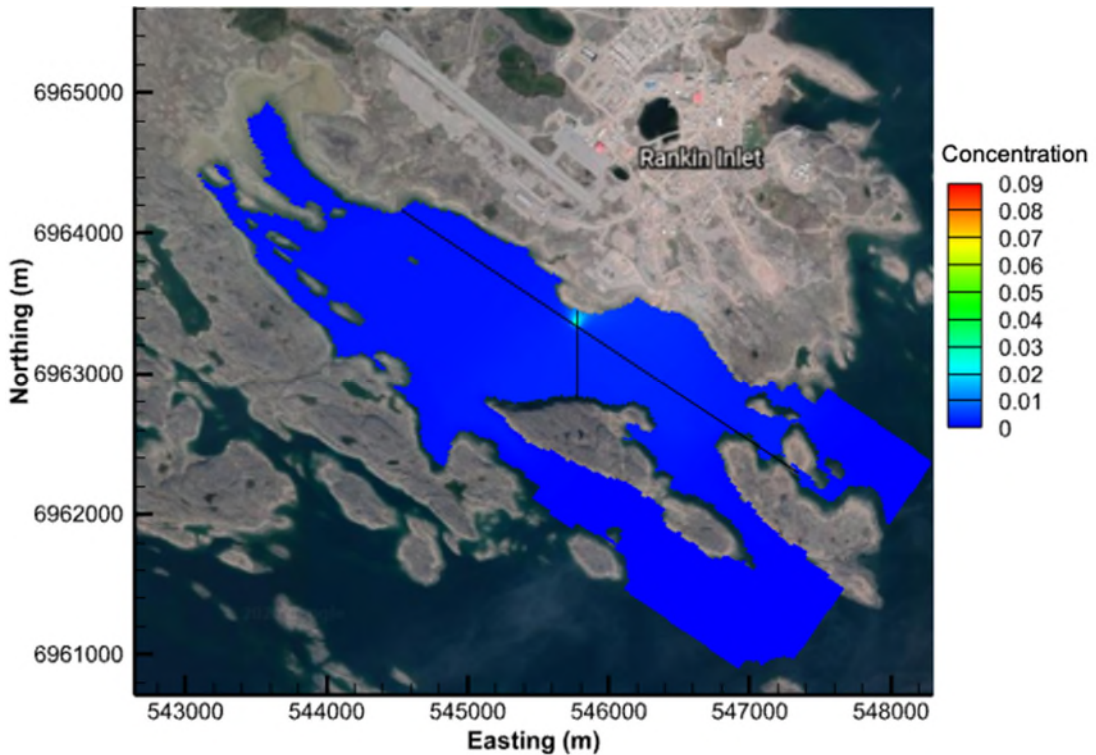


Figure 3.4. Instantaneous Maximum Effluent Concentrations on October 3 at 11:00 AM. Vertical line denotes the cross section plotted in Figure 3.5 (a), and slanted line in (a) is the cross section plotted in Figure 3.5 (b).

October 3 is identified as the period with the largest quantity of effluent within the bay (refer to Figure 3.1) and is shown in Figure 3.4. Snapshot of the maximum concentration on October 3 at 11:00 AM identifies relatively higher concentrations on the coastal side of the diffuser. Note that since concentrations are still well below the threshold concentration, the figure appears in uniform blue color, indicating a compliance with guidelines.


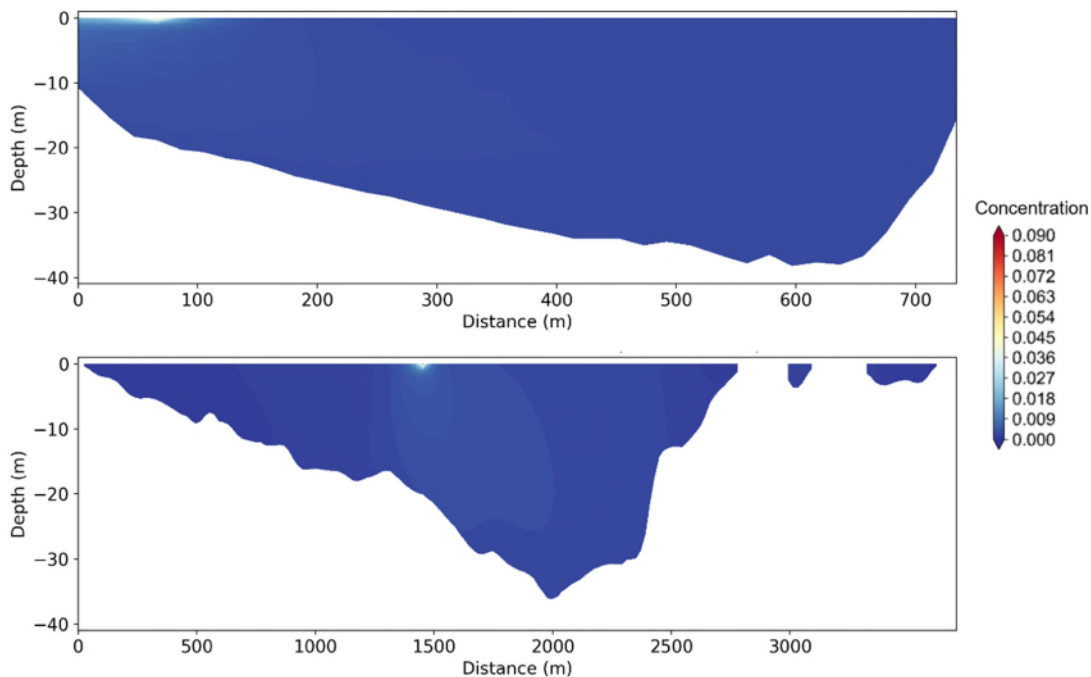


Figure 3.5. Vertical Profiles of Tracer Concentration at the Cross Sections Shown in Figure 3.4 on October 3 at 11:00 AM

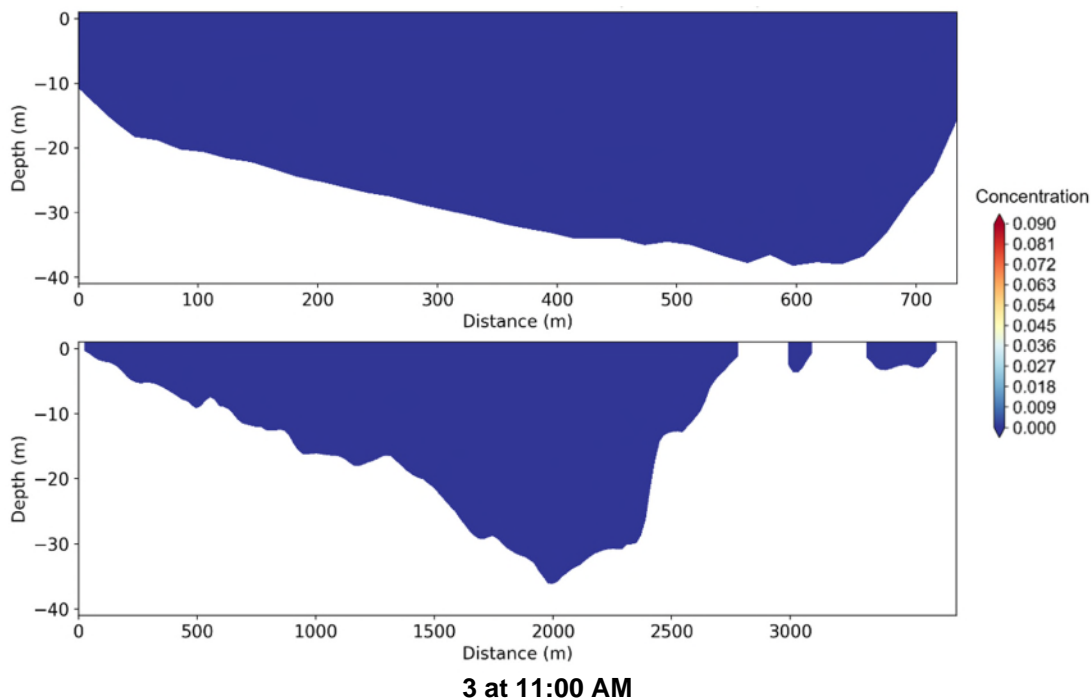

3 at 11:00 AM
Figure 3.6. Vertical Profiles of Tracer Concentration at the Cross Sections Shown in Figure 3.4 on November 5 at 00:00 AM

Figures 3.5 and 3.6 show vertical profiles of tracer concentration taken on October 3 (maximum quantity of effluent within the bay) and November 5 (5 days following the end of discharge). Similar to other graphs, the legend was established so as to present red colors when reaching the threshold concentration. As one can observe, most transects are blue, even near the diffuser, indicating a strong immediate mixing. Figure 3.4 shows that the buoyant effluent tends to rise to the surface and accumulates in the top layers, where concentration is still well below the target concentration.

To summarize, the target concentration value of 0.09 is met at all time at the 100-m mixing zone during the discharge season. The system recovers to a pre-effluent-discharge state at a great speed after the discharge stops by the end of October.

3.3 Temperature and Salinity

As established in Tetra Tech’s October 3-D modelling study, temperature and salinity changes due to effluent discharge at the 100-m mixing zone should not exceed 0.5 °C and 4 PSU, respectively. Figures 3.7 and 3.8 show the time series of temperature and salinity changes at the 100-m mixing zone, respectively. These changes represent the difference between the simulation containing the effluent discharge and the base case, when no discharge occurs. The base case is presented in Tetra Tech October 2020 report. The magnitude of the maximum change in the background seawater temperature/salinity is below 0.2 °C/0.1 PSU, confirming a compliance with guidelines/regulation.

Changes in surface temperature and salinity are negligible throughout the discharge season (figures not shown). The maximum changes in both temperature and salinity are found at the diffuser location, i.e., within the 100-m mixing zone where it is 0.028 °C in temperature and 0.085 PSU in salinity.

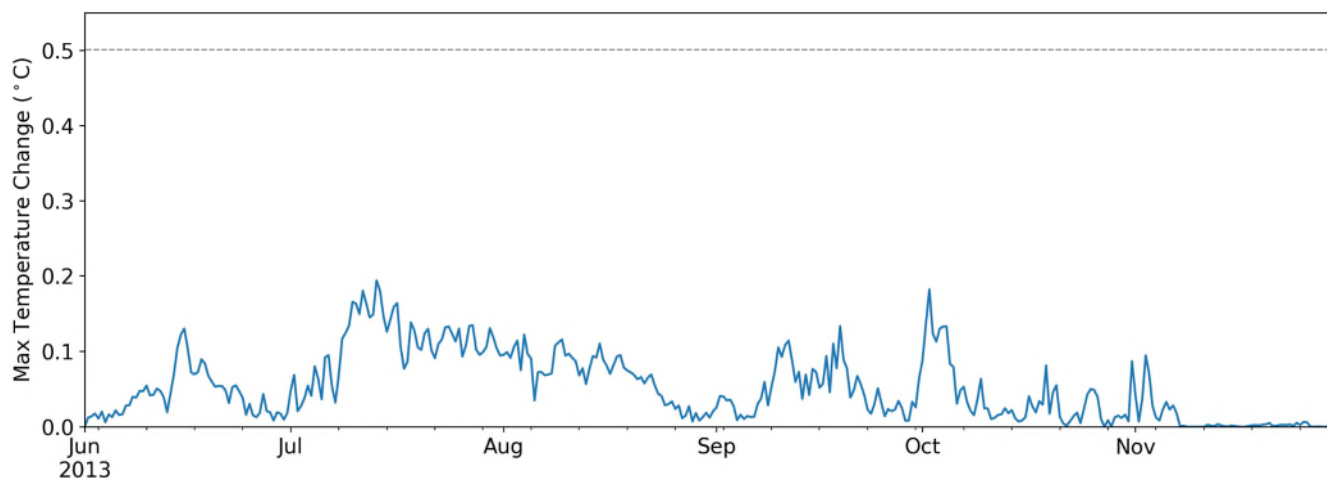


Figure 3.7. Time Series of the Magnitude of Maximum Temperature Change Relative to Ambient at the 100-m Mixing Zone (Dash Line Indicating the 0.5 °C Maximum Target Temperature Change)

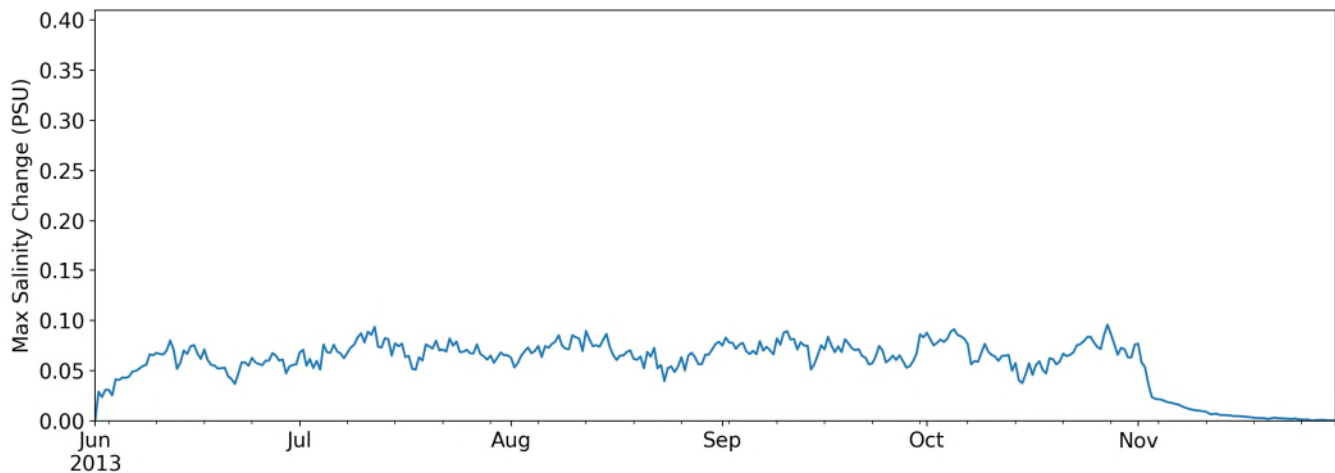


Figure 3.8. Time Series of the Magnitude of Maximum Salinity Change Relative to Ambient at the 100-m Mixing Zone (Maximum Target Salinity Change is 4 PSU)

4.0 CONCLUSIONS

This study investigates the transport and mixing of a discharged buoyant effluent in Melvin Bay. It serves as an addendum to Tetra Tech's October 2020 study titled "*Meliadine Mine Waterline Addendum: Melvin Bay Hydrodynamic Modelling and Characterization of the Fate and Behaviour of the Discharged Saline Effluent*". Effluent is discharge at the proposed diffuser location and at a depth of 20 m. The discharge season is from June to October. The 20,000 m³/d discharge rate is well above the projected mean daily flow rates for each month over mine operation (i.e., 2020 to 2028) and therefore represents a very conservative scenario. The 20th percentile of the effluent TDS value is chosen to represent a buoyant effluent on the lower end of its density.

The main conclusions are aligned with Tetra Tech's October main study:

- The receiving embayment will not fluctuate by more than +/- 10% with respect to chloride or salinity from the effluent discharge; specifically, the target dilution factor of 11:1 or target concentration of 9% at the 100 -m mixing zone is always satisfied during or post the discharge season;
- Temperature and salinity changes due to effluent discharge are well below the regulated threshold values (i.e. 0.2 °C change and 4 PSU change respectively) at the 100-m mixing zone throughout the discharge season. In other words, the release of the effluent has a very little impact on the ambient temperature and salinity at the edge of the mixing zone;
- Based on simulated conditions, the system takes slightly less than 20 days following the end of the discharge to recover to a near pre-effluent-discharge state (less than 0.001% of total released effluent remains in the domain) and;
- The Melvin Bay metocean conditions lead to very efficient flushing capacity of the study area that easily satisfies the various regulations and guidelines on effluent discharge of all the studied cases.

The main difference between this addendum study and Tetra Tech's October main study is that the effluent used in this simulation is buoyant and therefore tends to rise to the surface. Higher concentration of effluent is observed in the surface layer, but its value stays well below the threshold concentration within and at the edge of the mixing zone during and post the discharge season.


5.0 LIMITATIONS OF REPORT


This report and its contents are intended for the sole use of Agnico Eagle Mines and their agents. Tetra Tech Canada Inc. (Tetra Tech) does not accept any responsibility for the accuracy of any of the data, the analysis, or the recommendations contained or referenced in the report when the report is used or relied upon by any Party other than Agnico Eagle Mines, or for any Project other than the proposed development at the subject site. Any such unauthorized use of this report is at the sole risk of the user. Use of this document is subject to the Limitations on the Use of this Document attached in the Appendix or Contractual Terms and Conditions executed by both parties.

6.0 CLOSURE

We trust this technical memo meets your present requirements. If you have any questions or comments, please contact the undersigned.

Respectfully submitted,
Tetra Tech Canada Inc.

ENG.ACLE03008-03
ENG.ACLE03008-03
ENG.ACLE03008-03
ENG.ACLE03008-03
ENG.ACLE03008-03

ENG.ACLE03008-03
ENG.ACLE03008-03
ENG.ACLE03008-03
ENG.ACLE03008-03
ENG.ACLE03008-03

ENG.ACLE03008-03
ENG.ACLE03008-03
ENG.ACLE03008-03
ENG.ACLE03008-03
ENG.ACLE03008-03

ENG.ACLE03008-03
ENG.ACLE03008-03
ENG.ACLE03008-03
ENG.ACLE03008-03
ENG.ACLE03008-03

Prepared by:
Changheng Chen, PhD
Oceanographer
Direct Line: 604.238.3568
changheng.chen@tetrattech.com

Reviewed by:
Aurelien Hospital, M.Eng., M.Sc.
Hydrotechnical Specialist and Group Manager
Direct Line: 778.945.5747
aurelien.hospital@tetrattech.com

Enclosure: Limitations on the Use of this Document

GENERAL CONDITIONS

HYDROTECHNICAL

This report incorporates and is subject to these "General Conditions".

1.1 USE OF REPORT AND OWNERSHIP

This report pertains to a specific site, a specific development, and a specific scope of work. The report may include plans, drawings, profiles and other supporting documents that collectively constitute the report (the "Report").

The Report is intended for the sole use of TETRA TECH's Client (the "Client") as specifically identified in the TETRA TECH Services Agreement or other Contract entered into with the Client (either of which is termed the "Services Agreement" herein). TETRA TECH does not accept any responsibility for the accuracy of any of the data, analyses, recommendations or other contents of the Report when it is used or relied upon by any party other than the Client, unless authorized in writing by TETRA TECH.

Any unauthorized use of the Report is at the sole risk of the user. TETRA TECH accepts no responsibility whatsoever for any loss or damage where such loss or damage is alleged to be or, is in fact, caused by the unauthorized use of the Report.

Where TETRA TECH has expressly authorized the use of the Report by a third party (an "Authorized Party"), consideration for such authorization is the Authorized Party's acceptance of these General Conditions as well as any limitations on liability contained in the Services Agreement with the Client (all of which is collectively termed the "Limitations on Liability"). The Authorized Party should carefully review both these General Conditions and the Services Agreement prior to making any use of the Report. Any use made of the Report by an Authorized Party constitutes the Authorized Party's express acceptance of, and agreement to, the Limitations on Liability.

The Report and any other form or type of data or documents generated by TETRA TECH during the performance of the work are TETRA TECH's professional work product and shall remain the copyright property of TETRA TECH.

The Report is subject to copyright and shall not be reproduced either wholly or in part without the prior, written permission of TETRA TECH. Additional copies of the Report, if required, may be obtained upon request.

1.2 ALTERNATIVE REPORT FORMAT

Where TETRA TECH submits both electronic file and hard copy versions of the Report or any drawings or other project-related documents and deliverables (collectively termed TETRA TECH's "Instruments of Professional Service"), only the signed and/or sealed versions shall be considered final. The original signed and/or sealed version archived by TETRA TECH shall be deemed to be the original. TETRA TECH will archive the original signed and/or sealed version for a maximum period of 10 years.

Both electronic file and hard copy versions of TETRA TECH's Instruments of Professional Service shall not, under any circumstances, be altered by any party except TETRA TECH.

TETRA TECH's Instruments of Professional Service will be used only and exactly as submitted by TETRA TECH.

Electronic files submitted by TETRA TECH have been prepared and submitted using specific software and hardware systems. TETRA TECH makes no representation about the compatibility of these files with the Client's current or future software and hardware systems.

1.3 STANDARD OF CARE

Services performed by TETRA TECH for the Report have been conducted in accordance with the Services Agreement, in a manner consistent with the level of skill ordinarily exercised by members of the profession currently practicing under similar conditions in the jurisdiction in which the services are provided. Professional judgment has been applied in developing the conclusions and/or recommendations provided in this Report. No warranty or guarantee, express or implied, is made concerning the test results, comments, recommendations, or any other portion of the Report.

If any error or omission is detected by the Client or an Authorized Party, the error or omission must be immediately brought to the attention of TETRA TECH.

1.4 ENVIRONMENTAL AND REGULATORY ISSUES

Unless expressly agreed to in the Services Agreement, TETRA TECH was not retained to investigate, address or consider, and has not investigated, addressed or considered any environmental or regulatory issues associated with the project.

1.5 DISCLOSURE OF INFORMATION BY CLIENT

The Client acknowledges that it has fully cooperated with TETRA TECH with respect to the provision of all available information on the past, present, and proposed conditions on the site, including historical information respecting the use of the site. The Client further acknowledges that in order for TETRA TECH to properly provide the services contracted for in the Services Agreement, TETRA TECH has relied upon the Client with respect to both the full disclosure and accuracy of any such information.

1.6 INFORMATION PROVIDED TO TETRA TECH BY OTHERS

During the performance of the work and the preparation of this Report, TETRA TECH may have relied on information provided by persons other than the Client.

While TETRA TECH endeavours to verify the accuracy of such information, TETRA TECH accepts no responsibility for the accuracy or the reliability of such information even where inaccurate or unreliable information impacts any recommendations, design or other deliverables and causes the Client or an Authorized Party loss or damage.

General Conditions

HYDROTECHNICAL

1.7 GENERAL LIMITATIONS OF REPORT

This Report is based solely on the conditions present and the data available to TETRA TECH at the time the Report was prepared.

The Client, and any Authorized Party, acknowledges that the Report is based on limited data and that the conclusions, opinions, and recommendations contained in the Report are the result of the application of professional judgment to such limited data.

The Report is not applicable to any other sites, nor should it be relied upon for types of development other than those to which it refers. Any variation from the site conditions present at or the development proposed as of the date of the Report requires a supplementary investigation and assessment.

It is incumbent upon the Client and any Authorized Party, to be knowledgeable of the level of risk that has been incorporated into the project design, in consideration of the level of the hydrotechnical information that was reasonably acquired to facilitate completion of the design.

The Client acknowledges that TETRA TECH is neither qualified to, nor is it making, any recommendations with respect to the purchase, sale, investment or development of the property, the decisions on which are the sole responsibility of the Client.

1.8 JOB SITE SAFETY

TETRA TECH is only responsible for the activities of its employees on the job site and was not and will not be responsible for the supervision of any other persons whatsoever. The presence of TETRA TECH personnel on site shall not be construed in any way to relieve the Client or any other persons on site from their responsibility for job site safety.