



Meadowbank & Whale Tail Project
Blast Monitoring Program

Prepared by:
Agnico Eagle Mines Limited – Meadowbank Division

Version 4

March 2020

1. EXECUTIVE SUMMARY

The Guidelines for the Use of Explosives In or Near Canadian Waters (Wright and Hopky, 1998) as modified by the DFO for use in the North mention the following requirements that are applicable to the Meadowbank Mine:

- No explosive is to be detonated in or near fish habitat that produces, or is likely to produce, an instantaneous pressure change (IPC) (i.e. overpressure) greater than 100 kPa in the swim bladder of a fish.
- No explosive is to be detonated that produces, or is likely to produce, a peak particle velocity (PPV) greater than 13 mm/sec in a spawning bed during the period of egg incubation.

As a result of testing and monitoring in the NWT that indicates the limit of 100 kPa was not protective to fish, DFO has recommended to Agnico Eagle to use 50 kPa as the threshold for instantaneous pressure change.

Every blast is monitored with an InstanTel Minimate Blaster to ensure that vibrations generated by blasting are less than 13 mm/sec and the overpressure is under 50 kPa. The blasts are monitored from three locations at the Meadowbank site; one station is located near the northern end of Portage Pit, the second near the south end of Portage Pit and the other one at the north of Vault Pit. For the Whale Tail project, the blasts are monitored from a single location: on Mammoth Lake for the open pit operations. The latter site was moved closer to Mammoth Lake in late-June 2019. The new station is named Mammoth Station 2. Until June 25th, 2019 blasts were monitored from the Mammoth Station. From June 26th, 2019 blasts are monitored from Mammoth Station 2. Two other stations, Whale Tail Station 1 and Whale Tail Station 2, were used during part of the construction phase but were dismissed since Fall of 2018 as the fishout was complete and no blast were required for the Whale Tail Dike construction. Independent blast monitoring plans will be established for blasts that are outside of the Whale Tail Pit area, if any. The results of blast monitoring are systematically analyzed by the Engineering department within the 24 hours following the blasting operation. The blast monitoring results are interpreted and a blast mitigation plan is implemented immediately if the vibrations or the overpressure exceed the guidelines. A retro analysis is conducted to determine what caused the higher than expected results.

The following factors are considered in controlling vibration intensity and overpressure:

- confinement of the charges;

- coupling of the explosives charges to the rock affects how much energy is transferred to the rock;
- spatial (geometric) distribution of the explosives affects the character and intensity of the ground vibrations;
- charge weight per delay (8ms intervals); and
- blast direction

The blast monitoring reports are systematically archived and relevant information entered into a database. The blast monitoring data will be submitted for regulatory review annually in the Meadowbank Annual Report.

IMPLEMENTATION SCHEDULE

This Plan is implemented immediately (March 2020)

DISTRIBUTION LIST

Agnico Eagle – Environment Superintendents
Agnico Eagle – Environment General Supervisor
Agnico Eagle – Environmental Coordinators
Agnico Eagle – Engineering Superintendent & General Supervisor
Agnico Eagle – Engineering Coordinators

2. TABLE OF CONTENTS

1. EXECUTIVE SUMMARY	2
IMPLEMENTATION SCHEDULE	4
DISTRIBUTION LIST	4
2. TABLE OF CONTENTS.....	6
LIST OF TABLES	7
LIST OF FIGURES.....	7
1. Introduction	8
2. Blasting standard and criteria	9
3. Blast monitoring plan.....	12
3.1. Blast monitoring equipment.....	12
3.2. Equipment installation	14
3.3. Blast monitoring stations at Meadowbank	17
3.4. Whale Tail monitoring stations.....	19
3.5. Blast monitoring report.....	21
4. Blast Monitoring Outside Areas Covered.....	22
5. Blast mitigation plan	22
6. Conclusion	24
7. References.....	25

LIST OF TABLES

Table 1 : Set back distance (m) from center of detonation of a confined explosive to spawning habitat to achieve 13mm/sec guideline criteria for all types of substrate (Wright and Hopkins, 1998)	12
Table 2 : Set back distance (m) from center of detonation of a confined explosive to fish habitat to achieve 100 KPa guideline criteria for various substrate.	12
Table 3: Main Factors Influencing Blast Vibration Intensity and Overpressure (ISEE, 1998)	22

LIST OF FIGURES

Figure 1: Instantel Minimate Blaster Unit	13
Figure 2: Sensor Orientation (Instantel, 2016)	14
Figure 3: 3/8 inch bolt anchored in the rock	15
Figure 4: Transducer tightened with a nut	15
Figure 5: Final Set-up with the Microphone in the direction of the blast	16
Figure 6: General view of the Portage South monitoring station.....	16
Figure 7: Localizations of the two blast monitoring stations at Portage Pit	17
Figure 8: Localization of the blast monitoring station at Vault pit	18
Figure 9: Localization of the blast monitoring stations at Amaruq	19
Figure 10: Fish Habitat Types for Mammoth Lake	20

1. Introduction

Agnico Eagle Mines Limited – Meadowbank Division originally developed this Blasting Monitoring Program for the control of blasting vibrations at the Portage, Goose and Vault Pit in accordance with Condition 85 of Project Certificate No.004 issued by the Nunavut Impact Review Board (NIRB). This monitoring program was also updated to include blasting activities at Whale Tail Project in accordance with Condition 22 of NIRB Project Certificate No.008.

Agnico Eagle had developed a detailed blasting program to minimize the effects of blasting on fish and fish habitat, water quality, and wildlife and terrestrial VECs. The Blasting Program has been developed in consultation with the Fisheries and Oceans (DFO) and the Government of Nunavut (GN), and shall:

- a) Comply with the Guidelines for the Use of Explosives In or Near Canadian Fisheries Waters (Wright and Hopky, 1998) as modified by the DFO for use in the north;
- b) adhere to the guidance provided in the Monitoring Explosive-Based Winter Seismic Exploration in Waterbodies, NWT 2000-2002 (Cott and Hanna, 2005);
- c) Include a monitoring and mitigation plan to be developed in consultation with the DFO, and obtain DFO approval of the blasting program prior to the commencement of blasting;
- d) Restrict blasting when migrating caribou, or sensitive local carnivores or birds may be negatively affected; and
- e) Minimize the use of ammonium nitrate to reduce the effects of blasting on receiving water quality

The Blasting Monitoring Program will continue to be implemented during the operation phases of the Meadowbank and Whale Tail Projects.

2. Blasting standard and criteria

The effects of blasting are typically assessed in terms of Peak Particle Velocity (PPV). The US Bureau of Mines has established that the peak particle velocity is related to the scaled distance by the following relationship:

$$PPV = k * (R/W^{0.5})^{-b}$$

Where:

- PPV = Peak Particle Velocity, mm/s
- R = Distance from blast to point of concern, m
- W = Charge weight per delay, kg
- k = confinement factor – specific to site
- b = site factor

This formula can be used to estimate PPV and determine if the PPV will surpass the given limits before the blast occurs.

The pressure in water has a direct relationship with the peak particle velocity for the longitudinal or shock wave as it travels from the substrate (in our case permafrost) of water body to the water (Wright and Hopky, 1998). The formulas that described this relationship are found in the Guidelines for the Use of Explosives In or Near Canadian Fisheries Waters (Wright and Hopky, 1998):

Equation (A)

Equation (A) describes the transfer of shock pressure from the substrate to the water.

$$P_W = \frac{2 \left(\frac{Z_W}{Z_R} \right) P_R}{1 + \left(\frac{Z_W}{Z_R} \right)}$$

where:

P_W = pressure (kPa) in water

P_R = pressure (kPa) in substrate

Z_W = acoustic impedance of water

Z_R = acoustic impedance of substrate

Equation (B)

Equation (B) describes the relationship between acoustic impedance and the density and velocity of the medium through which the compressional wave travels.

$$\frac{Z_W}{Z_R} = \frac{D_W C_W}{D_R C_R}$$

where:

D_W = density of water = $1 \text{ g}\cdot\text{cm}^{-3}$

D_R = density of the substrate in $\text{g}\cdot\text{cm}^{-3}$

C_W = compressional wave velocity in water = $146,300 \text{ cm}\cdot\text{s}^{-1}$

C_R = compressional wave velocity in substrate in $\text{cm}\cdot\text{s}^{-1}$

The following values are used for D_R and C_R for various substrates:

Substrate	$D_R (\text{g}\cdot\text{cm}^{-3})$	$C_R (\text{cm}\cdot\text{s}^{-1})$
Rock	2.64	457,200
Frozen Soil	1.92	304,800
Ice	0.98	304,800
Saturated soil	2.08	146,300
Unsaturated soil	1.92	45,700

At both Meadowbank and Whale Tail projects, Agnico Eagle can consider the substrate to be frozen soil as the ground around the lakes is permafrost. So, Agnico Eagle is using $1.92 \text{ g}\cdot\text{cm}^{-3}$ as D_R and $304,800 \text{ cm}\cdot\text{s}^{-1}$ as C_R .

Equation (C)

Equation (C) describes the relationship between the peak particle velocity (V_R) and the pressure, density and compressional wave velocity in the substrate.

$$V_R = \frac{2P_R}{D_R C_R}$$

For Meadowbank and Whale Tail projects, assuming that $D_R = 1.92 \text{ g}\cdot\text{cm}^{-3}$ and $C_R = 304,800 \text{ cm}\cdot\text{s}^{-1}$ we can combine all the equations A, B and C to find the relationship between V_R , peak particle velocity in $\text{mm}\cdot\text{s}^{-1}$ and P_W , pressure (kPa) in water.

$$\frac{Z_W}{Z_R} = \frac{D_W C_W}{D_R C_R} = \frac{1 \text{ g/cm}^3 \cdot 146,300 \text{ cm/s}}{1.92 \text{ g/cm}^3 \cdot 304,800 \text{ cm/s}} = 0.25$$

$$P_W = \frac{2 \left(\frac{Z_W}{Z_R} \right) P_R}{1 + \left(\frac{Z_W}{Z_R} \right)} = \frac{2(0.25)P_R}{1 + (0.25)} = 0.4P_R$$

$$V_R = \frac{2P_R}{D_R C_R} \rightarrow P_R = \frac{V_R D_R C_R}{2}$$

$$\begin{aligned} P_W = 0.4P_R &= 0.4 \frac{V_R D_R C_R}{2} \\ &= 0.4 \frac{V_R \cdot 1.92 \text{ g/cm}^3 \cdot 304,800 \text{ cm/s}}{2} \cdot \frac{1 \text{ cm/s}}{10 \text{ mm/s}} \cdot \frac{1 \text{ kPa}}{10,000 \text{ g} \cdot \text{cm/s}^2} \end{aligned}$$

$$P_W = 1.1704V_R$$

Where:

V_R = Peak Particle Velocity in $\text{mm} \cdot \text{s}^{-1}$

P_W = Pressure in water in kPa

This last relationship is applied to the peak particle velocity (PPV) result of a blast to obtain the overpressure or instantaneous pressure change (IPC).

The Guidelines for the Use of Explosives In or Near Canadian Waters (Wright and Hopky, 1998) as modified by the DFO for use in the North mention the following requirements that are applicable to the Meadowbank Project:

- “8. No explosive is to be detonated in or near fish habitat that produces, or is likely to produce, an instantaneous pressure change (i.e. overpressure) greater than 100 kPa (14.5 psi) in the swim bladder of a fish.
9. No explosive is to be detonated that produces, or is likely to produce, a peak particle velocity greater than 13 mm/sec in a spawning bed during the period of egg incubation.”

As a result of testing and monitoring in the NWT that indicates the limit of 100kpa was not protective to fish, the DFO has recommended to Agnico Eagle to use 50 kPa as the threshold for instantaneous pressure change.

To keep PPV under the 13 mm/sec guideline Wright and Hopky (1998) suggests the setback distances shown in Table 1. It also should be noted that Wright and Hopky (1998) state the following:

The detonation of explosives in or near water produces post-detonation compressive shock wave characterized by a rapid rise to a high peak pressure followed by a rapid decay to below ambient hydrostatic pressure.

This statement is important for realizing that the important wave for reporting purposes is peak particle velocity for the compressive shock wave which is also referred to as the longitudinal wave.

Table 1 : Set back distance (m) from center of detonation of a confined explosive to spawning habitat to achieve 13mm/sec guideline criteria for all types of substrate (Wright and Hopkins, 1998)

	Weight of Explosive Charges (kg)						
	0.5	1	5	10	25	50	100
Setback distance (m)	10.7	15.1	33.7	47.8	75.5	106.7	150.9

Concerning the instantaneous pressure change (i.e. overpressure), Wright and Hopky (1998) suggest the following setback distances to keep it under the 100 kPa guideline.

Table 2 : Set back distance (m) from center of detonation of a confined explosive to fish habitat to achieve 100 KPa guideline criteria for various substrate.

Substrate Type	Weight of Explosive Charges (kg)							
	0.5	1	2	5	10	25	50	100
Rock	3.6	5.0	7.1	11.0	15.9	25.0	35.6	50.3
Sfrozen Soil	3.3	4.7	6.5	10.4	14.7	23.2	32.9	46.5
Ice	3.0	4.2	5.9	9.3	13.2	20.9	29.5	41.8
Saturated Soil	3.0	4.2	5.9	9.3	13.2	20.9	29.5	41.8
Rock	2.0	2.9	4.1	6.5	9.2	14.5	20.5	29.0

The Meadowbank Engineering team is also referring to the vibration and overpressure historical data to assess certain blast pattern closer to lakes. Over ten (10) years of historical data are archived in the Meadowbank database and they are often used as case study for delicate blasting operations.

3. Blast monitoring plan

3.1. Blast monitoring equipment

Every blast is monitored to ensure that vibrations generated by blasting are less than 13 mm/sec and the overpressure is under 50 KPa. The instrument used for blast monitoring is an InstanTEL Minimate Blaster which is fully compliant with the international Society of Explosives and Engineers performance specification for blasting seismographs (InstanTEL, 2005).

The Minimate Blaster has three main parts: a monitor, a standard transducer (geophone) and a microphone (Figure 1). The monitor contains the battery and electronic components of the instrument. It also checks the two sensors to be sure that they work properly. The transducer measures ground vibration with a mechanism called a geophone.



Figure 1: Instanetel Minimate Blaster Unit

The transducer has three geophones that measure the ground vibrations in terms of particle velocity. They measure transverse, vertical and longitudinal ground vibrations (Figure 2). Transverse ground vibrations agitate particles in a side to side motion. Vertical ground vibrations agitate particles in an up and down motion. Longitudinal ground vibrations agitate particles in a back and forth motion progressing outward from the event site (Instanetel, 2016). Longitudinal waves are commonly referred to as shock or compressional waves.

The microphone measures the PSP (Peak Sound Pressure) also referred as to the PAO (Peak Air Overpressure). The instrument checks the entire event waveform and displays the largest sound pressure in Pa unit.

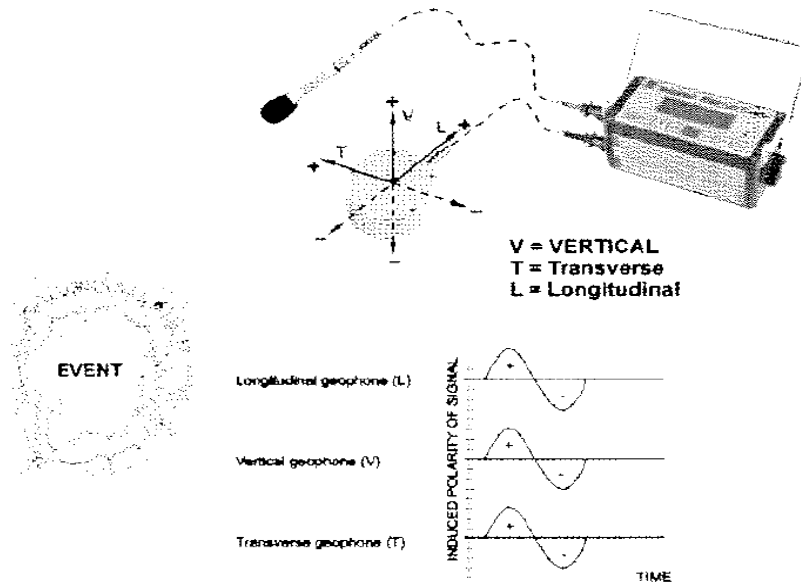


Figure 2: Sensor Orientation (InstanTel, 2016)

The Minimate Blaster (InstanTel) calculates the PPV each wave-type. For measuring compressive or shock waves the longitudinal wave is the reportable value.

The vector sum is also calculated by doing a sum of all wave types. The vector sum is the PVS (Peak Vector Sum) and it is calculated as follows:

$$PVS = \sqrt{(T^2 + V^2 + L^2)}$$

Where:

T = particle velocity along the transverse plane

V = particle velocity along the vertical plane

L = particle velocity along the longitudinal plane

3.2. Equipment installation

The transducer is installed on a hard surface, which in this case is rock. A 3/8 inch bolt is anchored in the rock (Figure 3) and the transducer is tightened with a nut (Figure 4). The arrow on the top of the standard transducer must be pointed in the direction of the event to ensure the geophone sensors, located inside the standard transducer, remains in their natural axis (InstanTel, 2016). The trigger level of the instrument is set to 1 mm/s and the transducer will start recording an event automatically when the ground vibrations are greater than or equal to 1 mm/s. The instrument is protected with a box and the microphone is oriented in the direction of the blast.

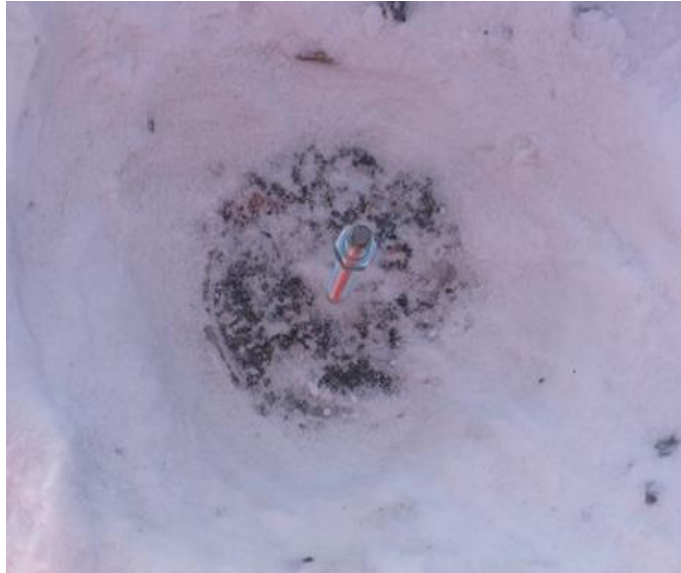


Figure 3: 3/8 inch bolt anchored in the rock



Figure 4: Transducer tightened with a nut



Figure 5: Final Set-up with the Microphone in the direction of the blast



Figure 6: General view of the Portage South monitoring station

3.3. Blast monitoring stations at Meadowbank

The blasts are monitored from three different locations. The locations were chosen to have the optimal distance between the blasts and the water (fish habitat). One station is located near the northern end of Portage pit and the other near the south end of Portage pit (Figure 7). The third station is located at the complete northern of the Vault Pit (Figure 8).

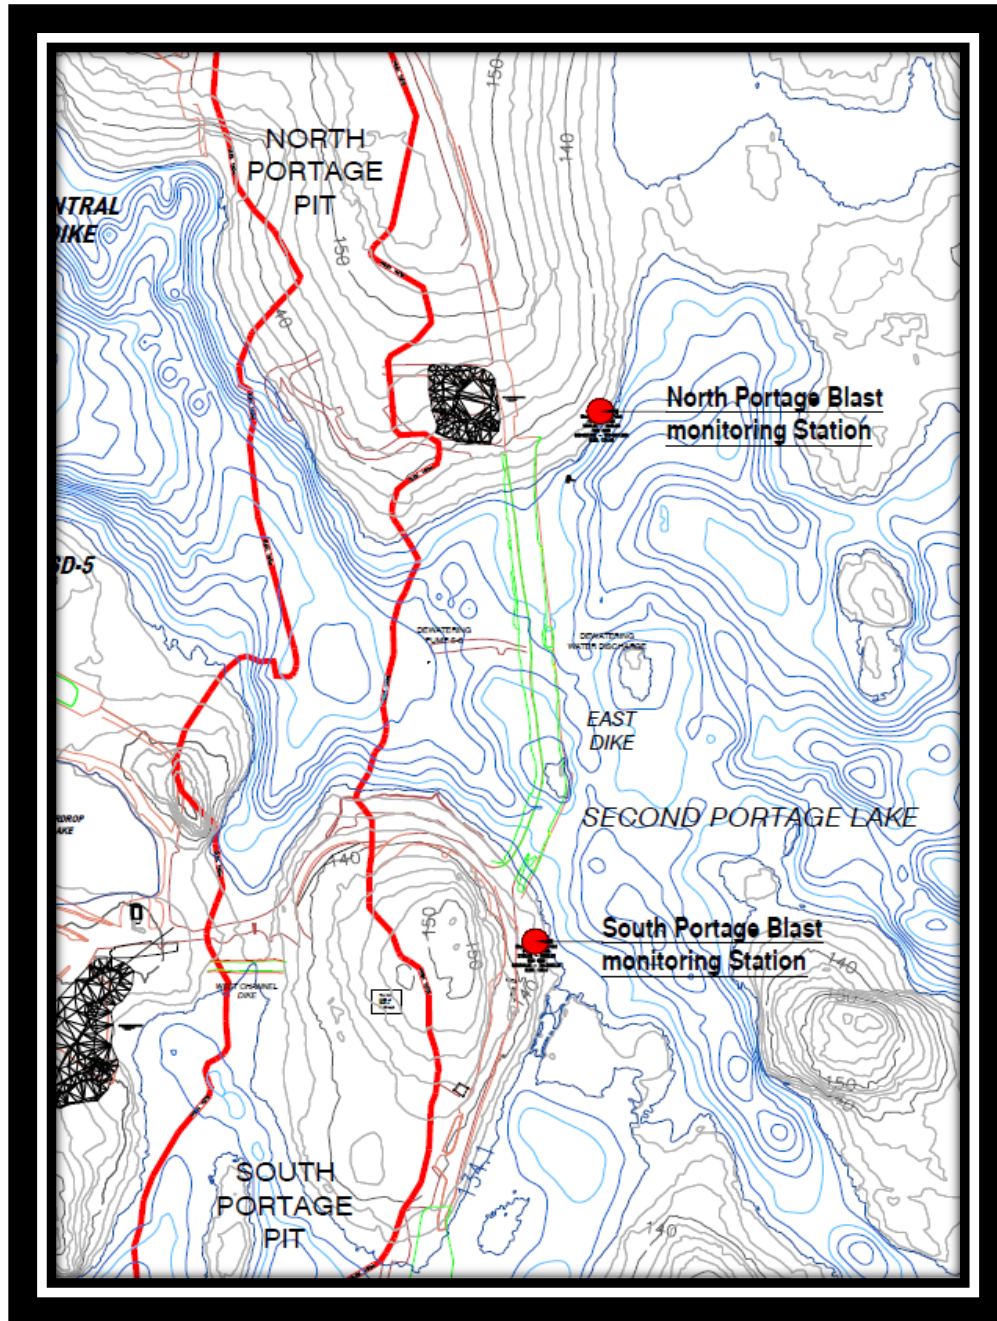


Figure 7: Localizations of the two blast monitoring stations at Portage Pit

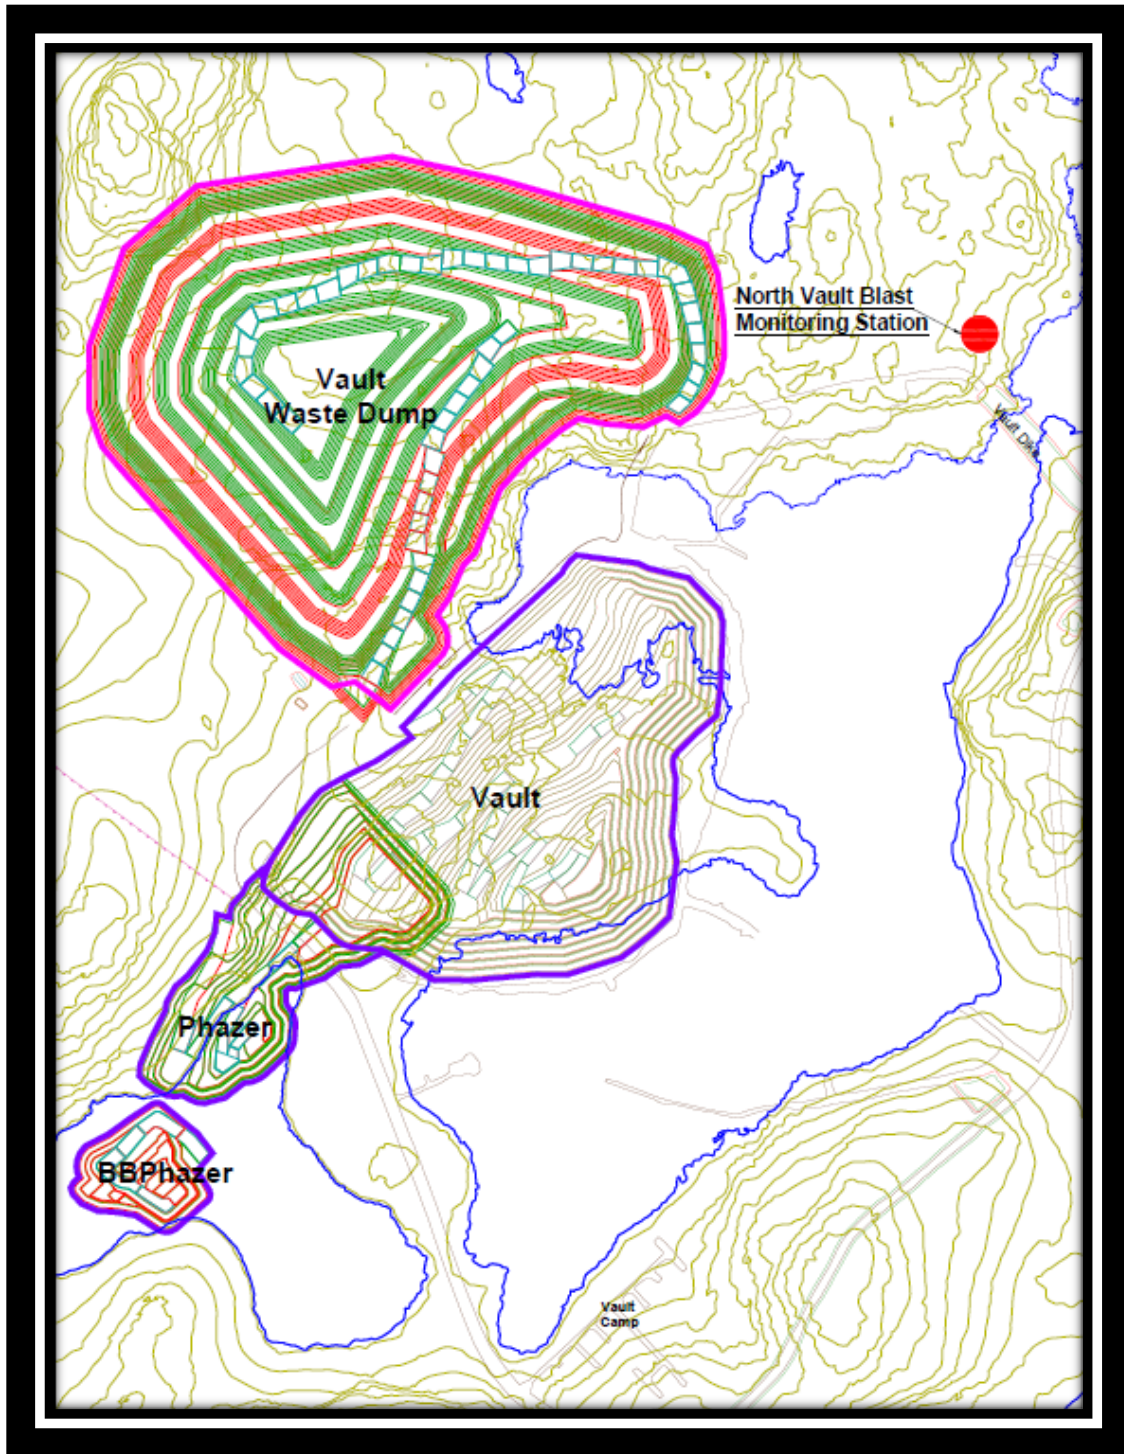


Figure 8: Localization of the blast monitoring station at Vault pit

3.4 Whale Tail monitoring stations

During 2019, the blasts of Whale Tail Pit were monitored from Mammoth Station until June 25th, 2019. A new monitoring station, named Mammoth Station 2, was implemented closer to the Mammoth Lake and from June 26th, 2019 monitoring is done from that station. The locations were chosen to have the optimal distance between the blasts and the water (fish habitat).

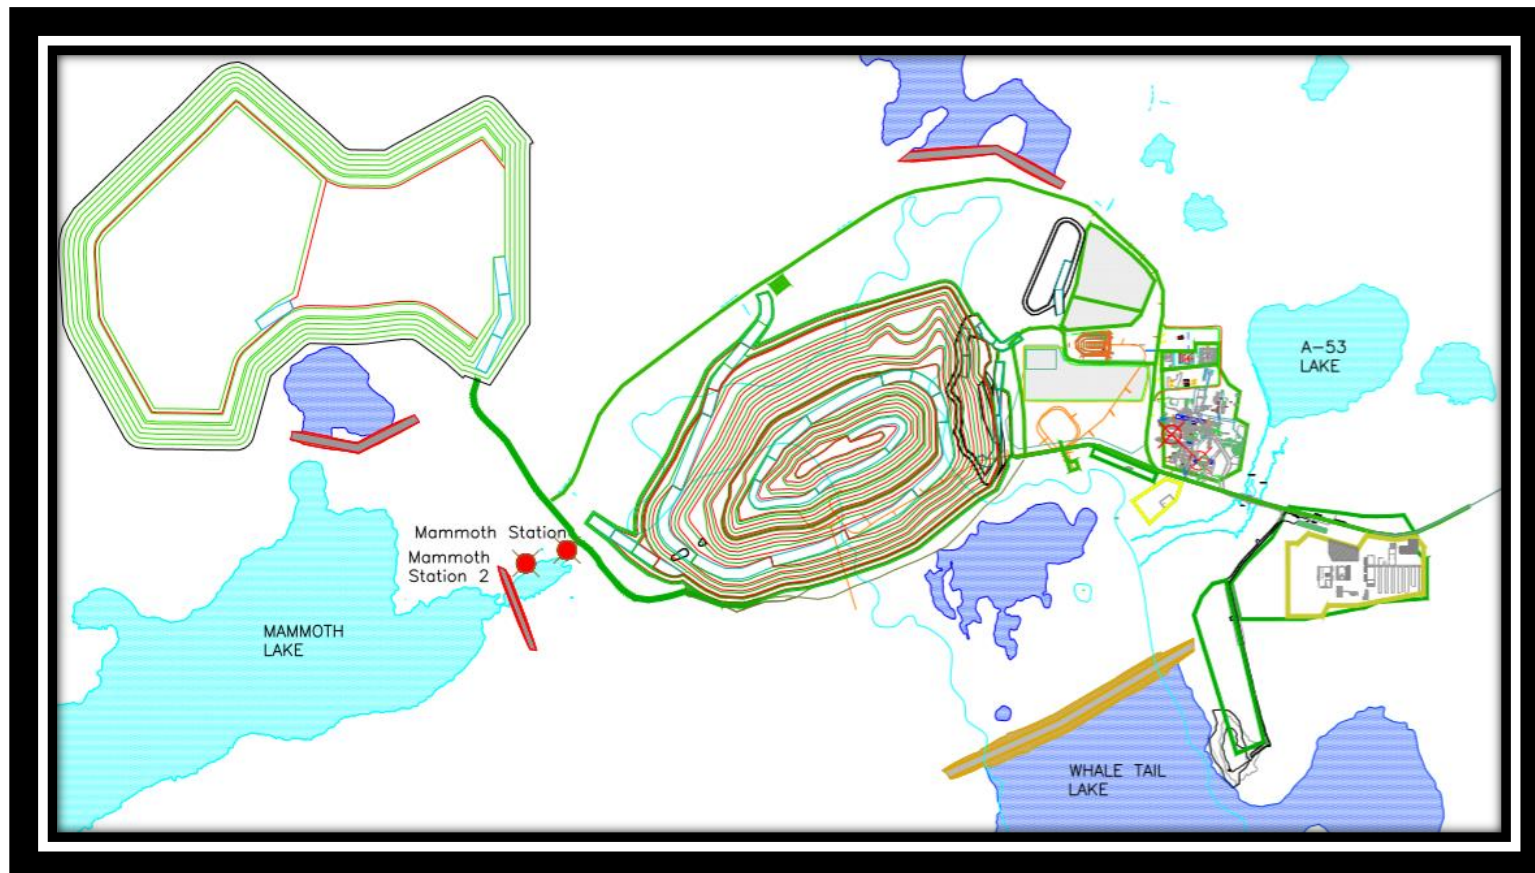


Figure 9: Localization of the blast monitoring stations at Amaruq

As illustrated in Figure 10, the possible fish spawning areas are located West of Mammoth Dike while Mammoth Station 2 is located East of the Dike. Since these areas are further away from blasting activities than the blast monitoring stations, we can assume that if we respect the 13mm/s threshold at these measuring points, the vibrations will be lower towards the fish spawning areas.


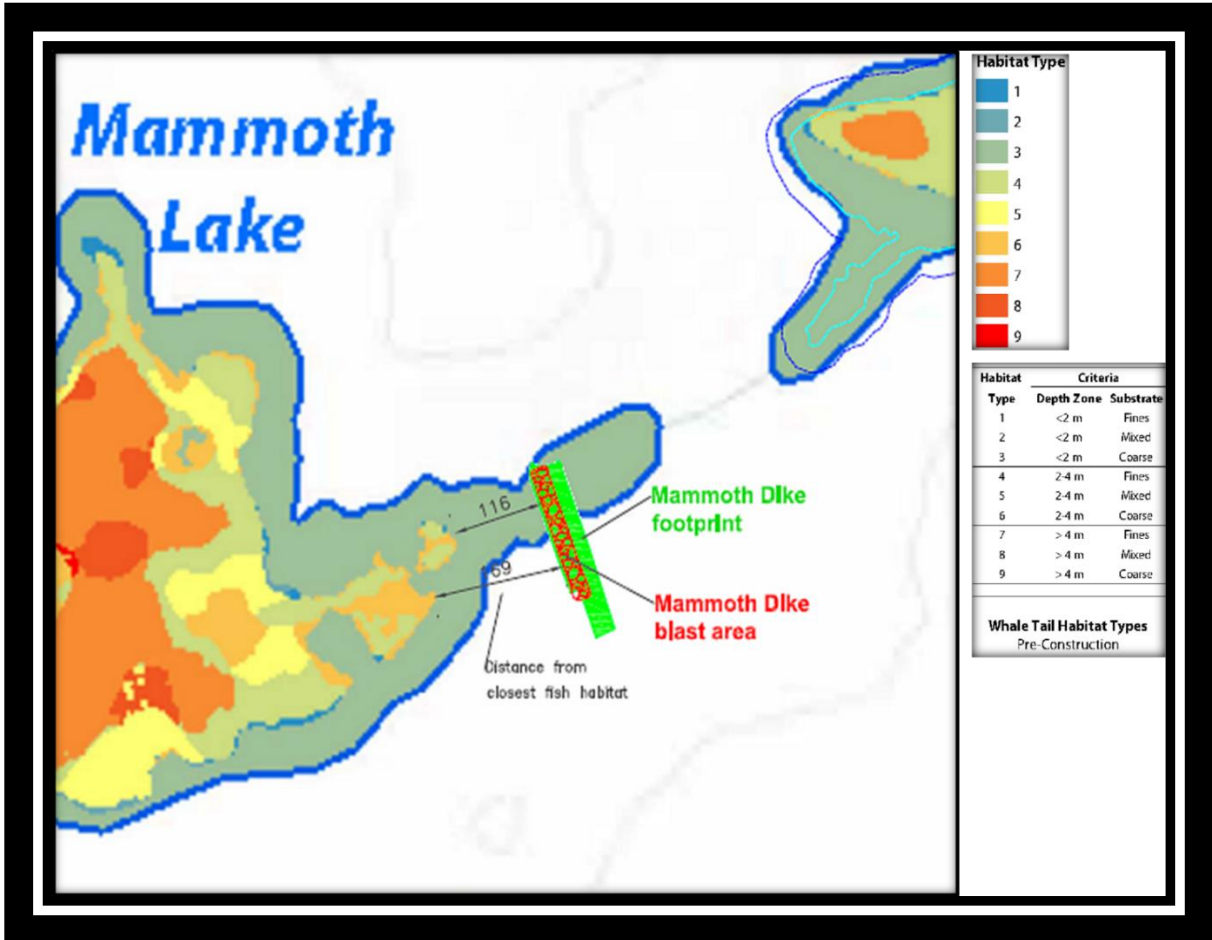


Figure 10: Fish Habitat Types for Mammoth Lake

3.5 Blast monitoring report

After each blast, the results are stored in a database and the report saved in the library for future reference. The blast monitoring results are interpreted and a blast mitigation plan is implemented immediately if the vibrations or the overpressure exceed the permitted limit (see section 4). The data will be submitted to DFO, GN, NIRB, Environment Canada, and the Nunavut Water Board annually in the Meadowbank Annual Report.

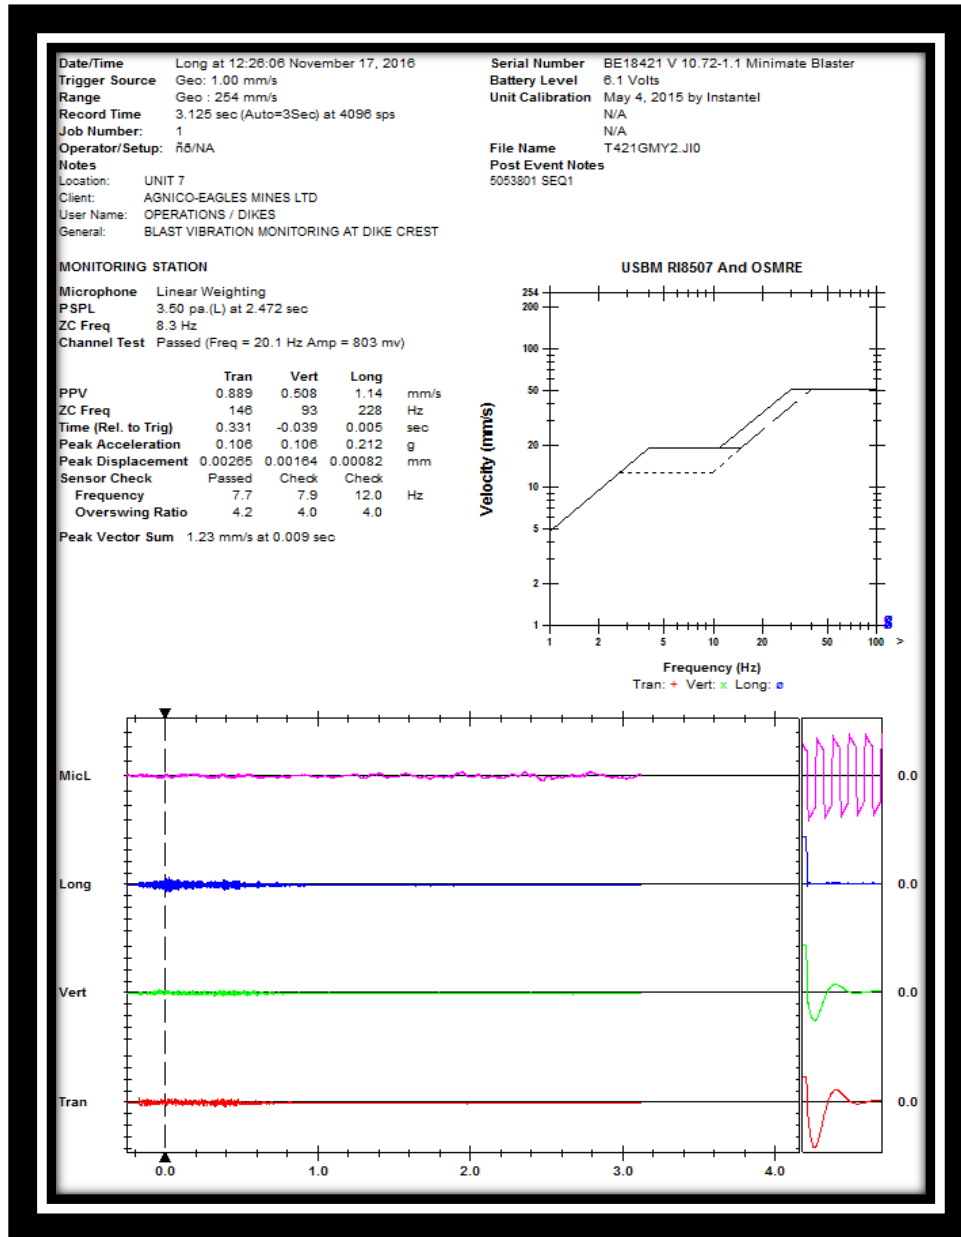

4. Blast Monitoring Outside Areas Covered

Agnico Eagle may execute construction projects, where blasting may be required, outside of the areas covered by this Blast Monitoring Program. In such cases, blast event vibrations and overpressures will be monitored following the guidelines of the program. Agnico Eagle will develop a suitable blast monitoring plan for each blasting activity that occurs outside the limits of the current plan. If vibrations or overpressures exceed the permitting limit during the egg incubation period, from August 15 to June 30, the DFO will be notified.

5. Blast mitigation plan

This mitigation plan is specific to blasts in the open pits (Portage Pit, Vault Pit, BB Phaser Pit, Phaser Pit and Whale Tail Pit). A Memo has been sent to Fisheries and Oceans with its own specific mitigation plan relative to blasts for Whale Tail Dike, Mammoth Dike and Whale Tail South Channel excavation.

If the vibrations or the overpressure approach or exceed the permitted limit, it is possible to conduct a retro analysis and find the factors that may have caused higher than desired results. It is important to consider the main factors influencing blast vibration intensity and overpressure (Table 3) in order to prevent such results (ISEE, 1998).

Table 3: Main Factors Influencing Blast Vibration Intensity and Overpressure (ISEE, 1998)

Main Factors Influencing Blast Vibration Intensity
Maximum charge weight detonating at one time
True distance (distance the waves must travel)
Geological conditions
Confinement
Physical properties of the rock
Coupling
Spatial distribution
Detonator timing scatter
Time of energy release
Type of Explosive

Geological conditions and rock properties are site specific and cannot be changed but there are several controllable factors that may reduce blast vibration intensity. Agnico Eagle takes the following factors into consideration at Meadowbank to reduce vibration intensity:

- I. The confinement of the charges affects the vibration intensity. If a charge is deeply buried with no free face nearby, the rock is not displaced and more of the energy goes into seismic waves (ISEE, 1998). The engineering department carefully plans pre-shear blasting that may have excessive burden in the first row of holes.
- II. The coupling of the explosives charges to the rock affects how much energy is transferred to the rock and hence the intensity of the vibrations. If smaller-diameter charges are placed in large-diameter holes, the charges are decoupled and less energy is transferred (ISEE, 1998). Using bulk products increases the coupling. In specific cases, like pre-splitting blast, it is a better idea to use packaged products that have a small diameter.
- III. The spatial (geometric) distribution of the explosives affects the character and intensity of the ground vibrations. A reduction in vibration is often found when there are many small charges per delay, widely distributed. There is a practical limit to the number of small charges that can reinforce each other, and the more there are, the less effective their reinforcement. A charge per delay composed of 100 charges of 1lb each will not generate the same intensity of vibration as a single charge of 100 lbs. (ISEE, 1998).
- IV. The main factor that is used to prevent high intensity vibration is the charge weight per delay. The 8-ms criterion is applied to prevent short delay times from overlapping or causing constructive reinforcement (addition) of two or more pulses (ISEE, 1998), which could cause higher vibrations. In every blast connection plan designed by the engineering department, this fact is taken into consideration. Timing is designed to minimize the number of holes that overlap in an 8 ms delay.
- V. The blasting direction of a blast pattern is another key element to minimize vibration once blasting besides areas close to lakes.

Mitigation techniques used to reduce overpressures are as follows:

- I. Depth of burial affects the overpressure. Improperly stemmed or insufficient collar will allow blast holes energy to be vented upwards. The quality of the stemming is also important: angular, coarse stemming material (3/4") is necessary to be efficient.
- II. Avoid having insufficient burden on the first row of holes. This can cause air blast and generate fly rocks. Leaving muck piles from the previous blast in front of the free face

(choke blasting) can reduce the amount of air blast generated and minimize the chance fly rocks.

- III. Avoid placing charges in open seams, clay filled seams, and highly fractured zones where gases could be vented.
- IV. Controlling the charge weight per delay especially for the pre-shear drilling. A limited number of kg per delay is in effect at Portage pit to avoid overpressure.

6. Conclusion

Blast monitoring process will continue to ensure that blast vibrations do not cause harm to aquatic life at Meadowbank and Whale Tail. The results are used to find a more accurate confinement factor of the site. The data collected helps to correlate different factors that could influenced vibration intensity and will be taken into consideration in the future to guarantee a constant improvement in controlling blast vibrations.

Agnico Eagle have overall successfully managed to keep our vibrations below the limit authorized. Agnico Eagle is committed to monitoring all blasts in order to fully comply with the regulation.

7. References

INSTANTEL INC. 2005, MINIMATE BLASTER OPERATOR MANUAL

INTERNATIONAL SOCIETY OF EXPLOSIVE ENGINEERS (ISEE) (1998). BLASTERS' HANDBOOK (17TH ED.). CLEVELAND: INTERNATIONAL SOCIETY OF EXPLOSIVE ENGINEERS..

WRIGHT, D.G., AND G.E. HOPKY. (1998) GUIDELINES FOR THE USE OF EXPLOSIVES IN OR NEAR CANADIAN

FISHERIES WATERS. CAN. TECH. REP. FISH. AQUAT. SCI. 2107: IV + 34P.

GAGNON, P. AND MACDONALD, P-E, MEADOWBANK AND AMARUQ GEOTECHNICAL ENGINEERS,

Memo: Blasting Activities – Mammoth Dike construction, Agnico Eagle